

TEST CASE DOCUMENTATION AND TESTING RESULTS

LSTC-QA-LS-DYNA-AWG-ERIF-13-6

TEST CASE ID AWG-ERIF-13

*MAT_DRY_FABRIC Single Element Test
Cases

Tested with LS-DYNA® R8.0.0 Revision 96167

Monday 16th March, 2015

Warranty Disclaimer:

The test case(s) described herein are for illustrative purposes only. LSTC does not warrant that a user of these or other LS-DYNA features will experience the same or similar results or that a feature will meet the user's particular requirements or operate error free. FURTHERMORE, THERE ARE NO WARRANTIES, EITHER EXPRESS OR IMPLIED, ORAL OR WRITTEN, WITH RESPECT TO THE DOCUMENTATION AND SOFTWARE DESCRIBED HEREIN INCLUDING, BUT NOT LIMITED TO ANY IMPLIED WARRANTIES (i) OF MERCHANTABILITY, OR (ii) FITNESS FOR A PARTICULAR PURPOSES, OR (iii) ARISING FROM COURSE OF PERFORMANCE OR DEALING, OR FROM USAGE OF TRADE OR. THE REMEDIES SET FORTH HEREIN ARE EXCLUSIVE AND IN LIEU OF ALL OTHER REMEDIES FOR BREACH OF WARRANTY.

Document Information	
Confidentiality	external use
Document Identifier	LSTC-QA-LS-DYNA-AWG-ERIF-13-6
Author(s)	Prepared by LS-DYNA® Aerospace Working Group
Number of pages	17
Date created	Monday 16 th March, 2015
Distribution	LS-DYNA® Aerospace Working Group / internal LSTC QA

Contents

1	Introduction	1
1.1	Purpose of this Document	1
2	Test Case Information	2
3	Test Case Specification	3
3.1	Test Case Purpose	3
3.2	Test Case Description	4
3.3	Model Description	5
4	Test Specifications	7
4.1	Test Case Targets	7
4.2	Pass/Fail Criteria	7
5	Test Case Results	8
5.1	Software and Hardware Specifications	8
5.2	Results Summary	9
5.3	Result Details	10
5.3.1	Sub Test Case ID 1 - Test Target 1	11
5.3.2	Sub Test Case ID 2 - Test Target 2	11
5.3.3	Sub Test Case ID 3 - Test Target 3	12
5.3.4	Sub Test Case ID 4 - Test Target 4	12
5.3.5	Sub Test Case ID 5 - Test Target 5	13
5.3.6	Sub Test Case ID 5 - Test Target 6	13
5.3.7	Sub Test Case ID 6 - Test Target 7	14
5.3.8	Sub Test Case ID 6 - Test Target 8	14
5.3.9	Sub Test Case ID 7 - Test Target 9	15
5.3.10	Sub Test Case ID 7 - Test Target 10	15
5.3.11	Sub Test Case ID 8 - Test Target 11	16
5.3.12	Sub Test Case ID 8 - Test Target 12	16
	References	17

1 Introduction

1.1 Purpose of this Document

This document specifies the test case AWG-ERIF-13. It provides general test case information like name and ID as well as information to the confidentiality, status, and classification of the test case.

A detailed description of the test case is given, the purpose of the test case is defined, and the tested features are named. The test case specifications also state the target measures for testing and the expected results, as well as their pass and fail criteria.

Testing results are provided in section 5 for the therein mentioned LS-DYNA® version and platforms.

2 Test Case Information

Test Case Summary	
Confidentiality	external use
Test Case Name	*MAT_DRY_FABRIC Single Element Test Cases
Test Case ID	AWG-ERIF-13
Test Case Status	active
Test Case Classification	Example
Test Case Source	LSTC
Tested Keyword	*MAT_DRY_FABRIC
Member of Test Suite	AWG ERIF SUITE
Metadata	AWG ERIF

Table 1: Test Case Summary

3 Test Case Specification

3.1 Test Case Purpose

The purpose of Test Case ID AWG-ERIF-13 is the comparison of results from different cpu architectures for a single element test case containing *MAT_DRY_FABRIC keyword.

The reliability and consistency of LS-DYNA® as a finite element solver for these test cases is evaluated by performing analyses on different cpu architecture platforms.

3.2 Test Case Description

This Test Case contains eight sub test cases which exercise eight different loading conditions on a single square patch of Kevlar[®] fabric.

All Sub Test Cases using the initial geometry (see figure 1) and loading conditions can be found in table 2.

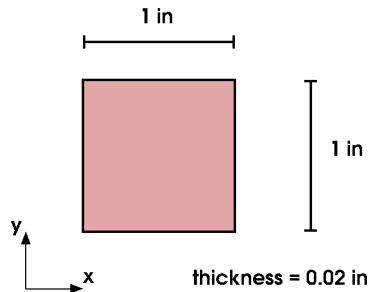


Figure 1: Model sketch: Square patch of Kevlar[®] fabric

Sub Test Case ID	Loading conditions
1	Tension in global x direction
2	Tension in global y direction
3	Compression in global x direction
4	Compression in global y direction
5	Tension in global x direction, material axis rotated by 45 degrees
6	Bi-axial tension in global x and y direction
7	Nonuniform bi-axial tension in global x and y direction
8	Bi-axial compression in global x and y direction

Table 2: Sub Test Case Id and their loading conditions

Table 3 contains a short summary of the physical model set up.

Physical Model Information	
Length (global x direction)	1 inches
Length (global y direction)	1 inches
Thickness (global z direction)	0.02 inches
Material	Kevlar [®]

Table 3: Model set-up data

3.3 Model Description

The square patch of Kevlar[®] fabric is discretized with one shell element and eight different load patterns are applied (see figure 2).

The model specifications can be found in table 4, and table 5 defines the sub test case specification.

The material definitions and their parameters can be found in the input decks.

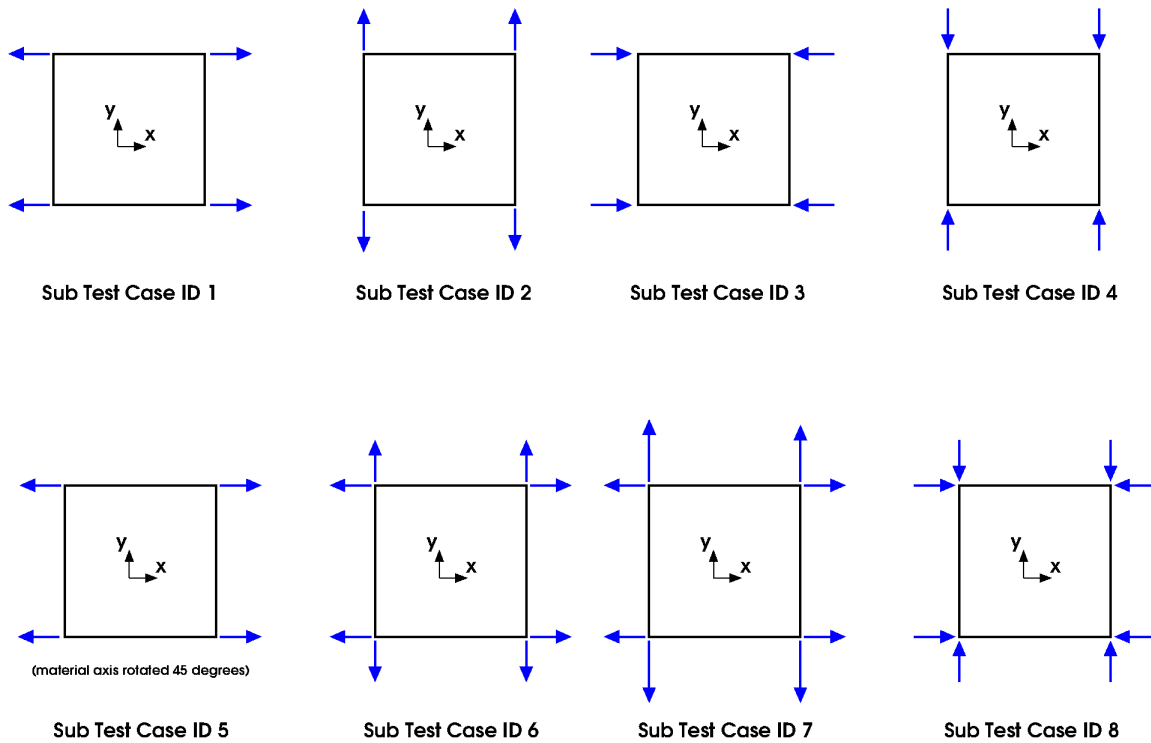


Figure 2: FEA model: Cylinders with constraints

FEA Model information								
Sub Test Case ID ¹	1	2	3	4	5	6	7	8
Nodes	4	4	4	4	4	4	4	4
Shell elements	1	1	1	1	1	1	1	1
Shell materials	1	1	1	1	1	1	1	1
Units	in (length), ms (time), Mlbf-ms ² /in (mass), Mlbf (force), Mpsi (stress), Mlbf-in (energy)							

¹ Sub Test Case ID refers to the ID's in table 5

Table 4: FEA Model Information

Sub Test ID	Input Deck Name
1	single_element_tension_x.mat214.k
2	single_element_tension_y.mat214.k
3	single_element_compression_x.mat214.k
4	single_element_compression_y.mat214.k
5	single_element_tension_rotate_45.mat214.k
6	single_element_biaxial_tension.mat214.k
7	single_element_biaxial_tension_nonuniform.mat214.k
8	single_element_biaxial_compression.mat214.k

Table 5: Specification of sub test cases

4 Test Specifications

4.1 Test Case Targets

Table 6 displays the test case targets. The test case targets specify values or a series of values taken from the finite element analysis solution of the test case and they are used in a comparison of analysis results on different cpu architectures. They are chosen in a way that they are representative of the numerical model.

Test Case Targets					
Target number	Sub Test Case ID	output	component type	component id	retrieved from
1	1	integration point	x stress	1	binout/elout file
2	2	integration point	y stress	1	binout/elout file
3	3	integration point	x stress	1	binout/elout file
4	4	integration point	y stress	1	binout/elout file
5	5	integration point	x stress	1	binout/elout file
6	5	integration point	y stress	1	binout/elout file
7	6	integration point	x stress	1	binout/elout file
8	6	integration point	y stress	1	binout/elout file
9	7	integration point	x stress	1	binout/elout file
10	7	integration point	y stress	1	binout/elout file
11	8	integration point	x stress	1	binout/elout file
12	8	integration point	y stress	1	binout/elout file

Table 6: Test Case targets for Test Case ID AWG-ERIF-13

Test case targets are used to evaluate the cross cpu architecture consistency (see section 4.2).

4.2 Pass/Fail Criteria

These are the Pass/Fail criteria used for the cross cpu architecture consistency test of the Test Case ID AWG-ERIF-13.

The sub test case passes if all of the following criteria are reached:

- For a specific test case target, the maximum distance between an x-y pair of a slope of one cpu architecture/software version combination to at least one x-y pair of all other tested cpu architecture/software version combinations is 15% of the maximum slope value.

Otherwise the cross cpu architecture consistency test fails.

5 Test Case Results

5.1 Software and Hardware Specifications

In order to ensure cross-platform consistency, the herein mentioned sub test cases are run on platforms specified in table 7 and the results are calculated with software versions defined in table 8.

Platform Name	Operating system	CPU type	MPI-Protocol	Number of cpu's ¹
sandwich	SUSE LES 11.1	Intel® Xeon® E7- 8837 @ 2.67GHz	Platform MPI 8.2.0.0	1
ham	CentOS 5.4	AMD® Opteron® 8435 @ 800MHz	Platform MPI 8.1.0.0	1
sgi64d	SUSE LES 9.4 ²	Intel® Itanium® 2 @ 1.6GHz	SGI MPT 1.13	1

¹ Number of cpu's used for calculation of the test case

² SGI PROPAC 4

Table 7: Used Platforms and CPU Type's

Product	Version	Release	Revision	Parallel type ¹	Precision ²	executable
LS-DYNA®	971	R8.0.0	96167	SMP	SP	ls971.96167.R8.0.0
LS-DYNA®	971	R8.0.0	96167	SMP	DP	ld971.96167.R8.0.0
LS-DYNA®	971	R8.0.0	96167	MPP	SP	mpp971.96167.R8.0.0
LS-DYNA®	971	R8.0.0	96167	MPP	DP	mpd971.96167.R8.0.0

¹ MPP = Massively Parallel Processing, SMP = Symmetric Multiprocessing

² SP = single precision, DP = double precision

Table 8: Tested LS-DYNA® version

5.2 Results Summary

Table 9 contains the results of the Test Case ID AWG-ERIF-13 completed with all combinations of software and hardware defined in section 5.1 (8 * 3 * 4 total calculation runs).

Details on the test results can be found in the section 5.3.

The table 9 cross cpu architecture consistency summary is:

- **PASS** - Pass criteria in section 4.2 is attained.
- **FAILED** - Pass criteria in section 4.2 is not attained.
- **ERROR** - sub test case terminates due to error.
- **N/A** - sub test case was not calculated.

Sub Test Case ID	PASS/FAILED
1	PASS
2	PASS
3	PASS
4	PASS
5	PASS
6	PASS
7	PASS
8	PASS

Table 9: Results summary for Test Case ID AWG-ERIF-13

5.3 Result Details

The following subsections contain detailed results for the Test Case ID AWG-ERIF-13 for LS-DYNA® R8.0.0 Revision 96167.

For each sub test case defined in section 3.3 there is a graph displaying the time history of the result target defined in section 4.1 for the platform and software version combinations defined in section 5.1.

The title of the graph states the name of the input deck, the result file name, and the output separated by underscores. The legend contains the result file name, output, platform, and executable. The last number of the legend specifies the number of cpu's used to calculate the example. A leading minus sign refers to the compatibility option for SMP calculations (see [1] for details on this option).

Example for title and legend:

Title:

'single_element_tension_x_mat214.k: elout_shell_sxx_1_1_1' states that the input deck for sub test case 1 was used to calculate these results. The component displayed is the stress in x-direction for integration point 1 derived from the 'elout' output file.

Legend:

'elout_shell_sxx_1_1_1_sandwich_ls971.96167.R8.0.0_1' states that the graph shows the stress in x-direction for integration point 1 derived from the 'elout' output file for an input deck which was calculated on the 'sandwich' platform with a LS-DYNA® R8.0.0 Revision 96167 binary (SMP, single precision) on one processors.

5.3.1 Sub Test Case ID 1 - Test Target 1

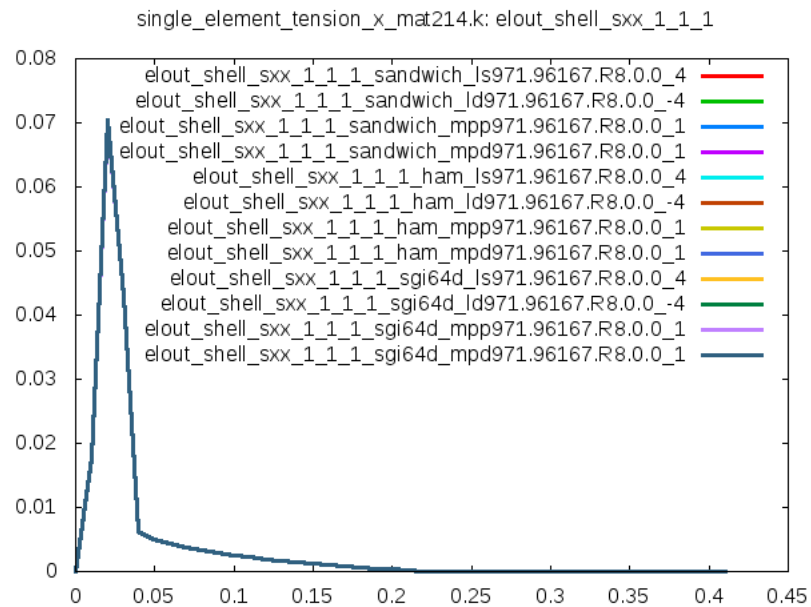


Figure 3: Cross platform results, stress in x-direction, integration point 1, sub test case ID 1

5.3.2 Sub Test Case ID 2 - Test Target 2

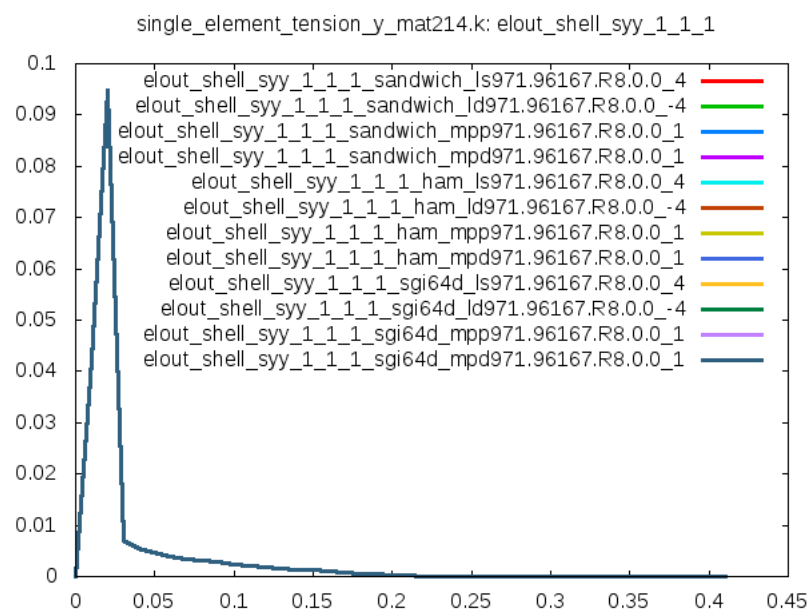


Figure 4: Cross platform results, stress in y-direction, integration point 1, sub test case ID 2

5.3.3 Sub Test Case ID 3 - Test Target 3

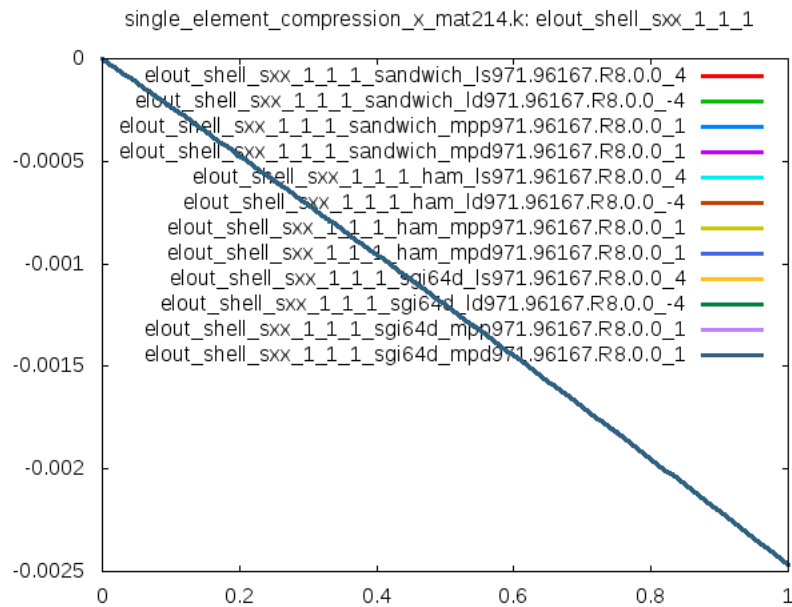


Figure 5: Cross platform results, stress in x-direction, integration point 1, sub test case ID 3

5.3.4 Sub Test Case ID 4 - Test Target 4

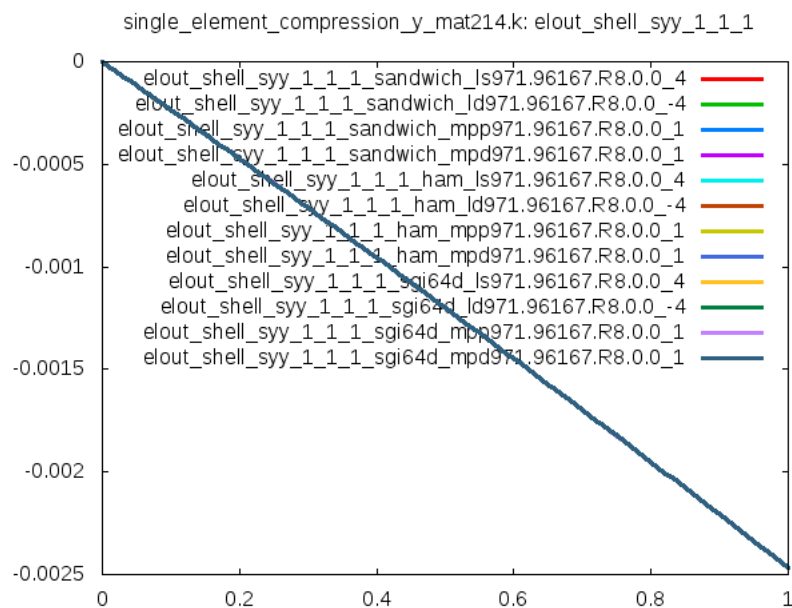


Figure 6: Cross platform results, stress in y-direction, integration point 1, sub test case ID 4

5.3.5 Sub Test Case ID 5 - Test Target 5

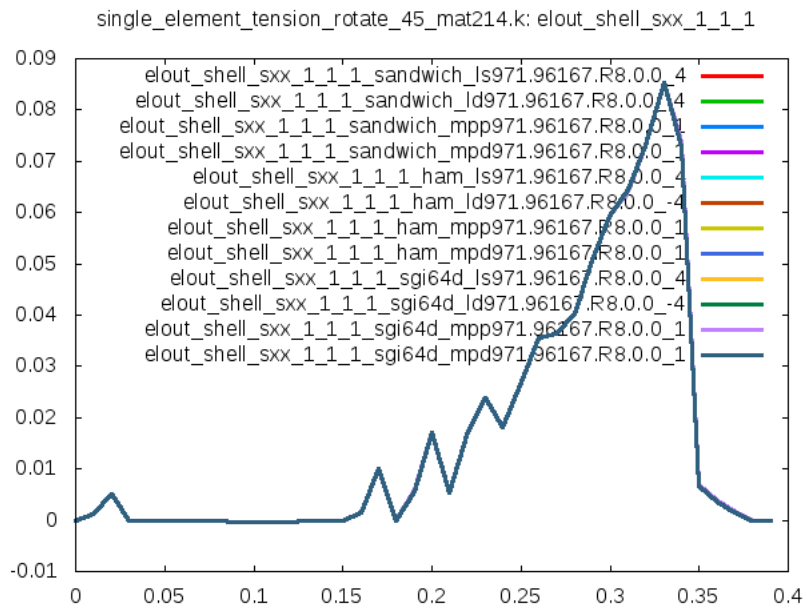


Figure 7: Cross platform results, stress in x-direction, integration point 1, sub test case ID 5

5.3.6 Sub Test Case ID 5 - Test Target 6

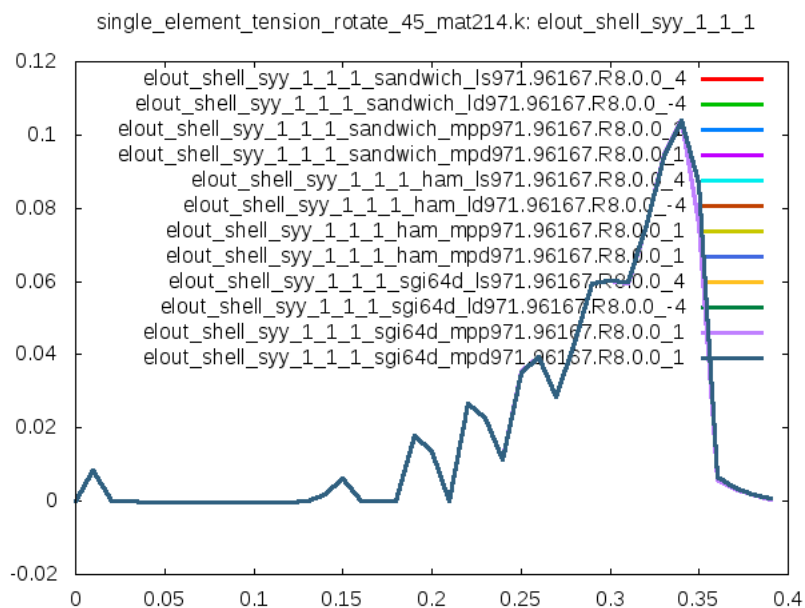


Figure 8: Cross platform results, stress in y-direction, integration point 1, sub test case ID 5

5.3.7 Sub Test Case ID 6 - Test Target 7

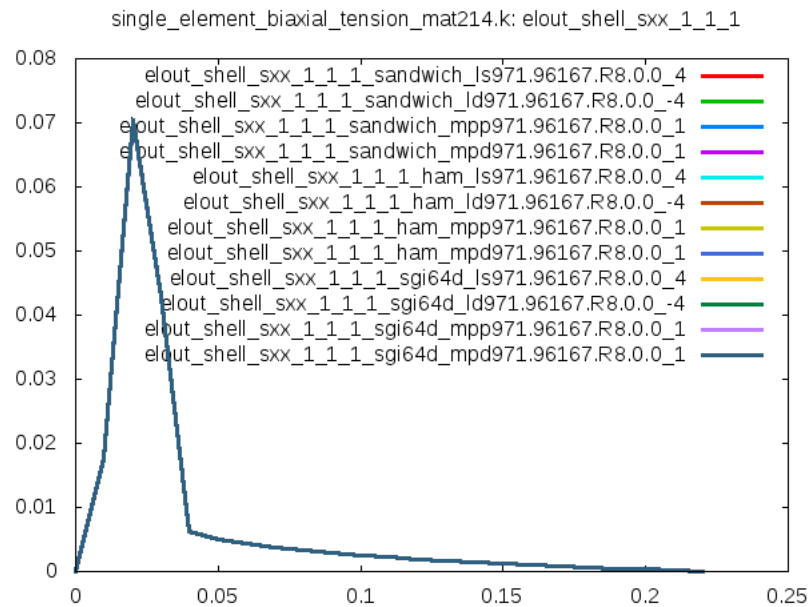


Figure 9: Cross platform results, stress in x-direction, integration point 1, sub test case ID 6

5.3.8 Sub Test Case ID 6 - Test Target 8

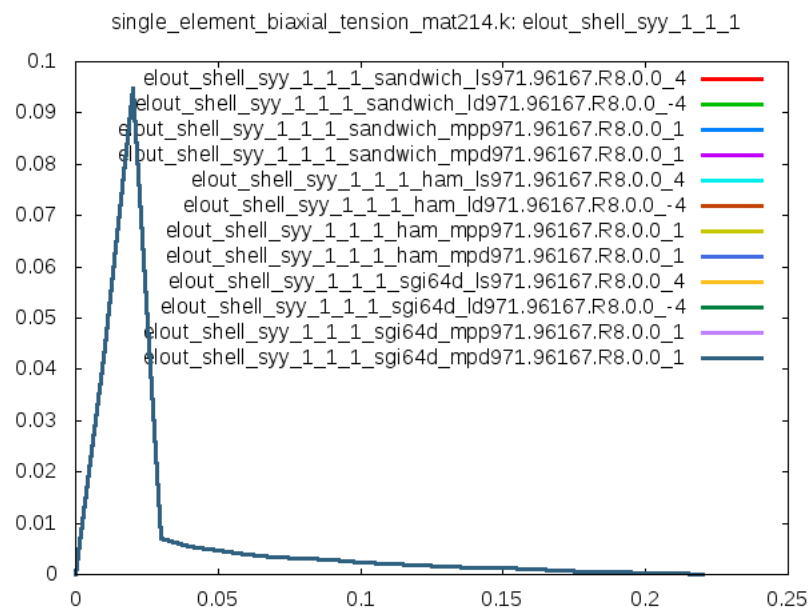


Figure 10: Cross platform results, stress in y-direction, integration point 1, sub test case ID 6

5.3.9 Sub Test Case ID 7 - Test Target 9

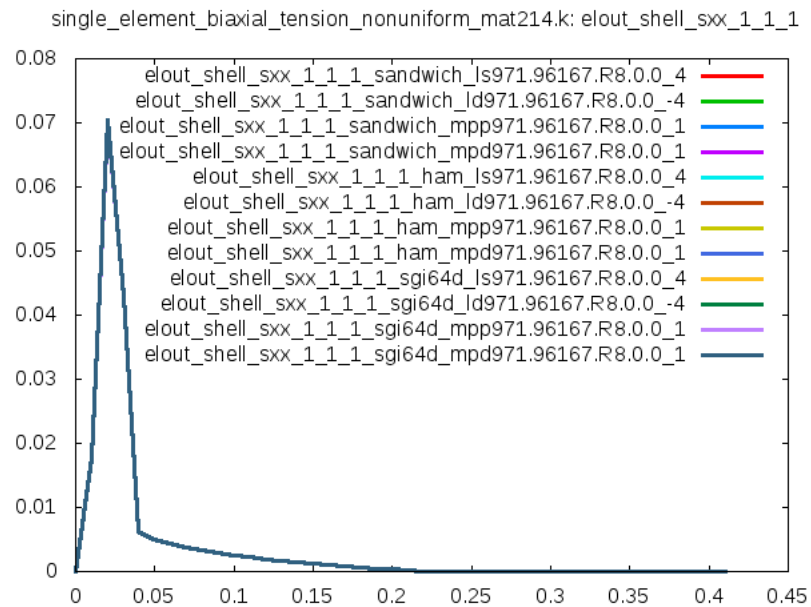


Figure 11: Cross platform results, stress in x-direction, integration point 1, sub test case ID 7

5.3.10 Sub Test Case ID 7 - Test Target 10

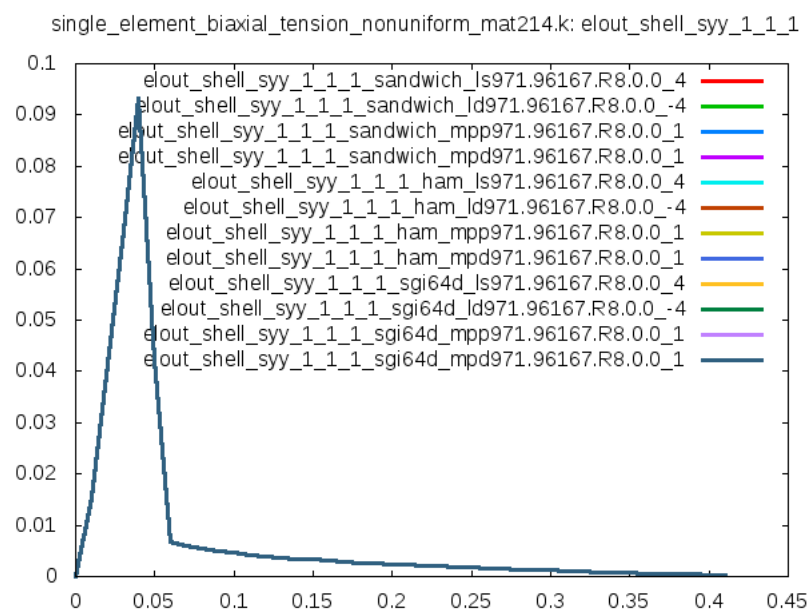


Figure 12: Cross platform results, stress in y-direction, integration point 1, sub test case ID 7

5.3.11 Sub Test Case ID 8 - Test Target 11

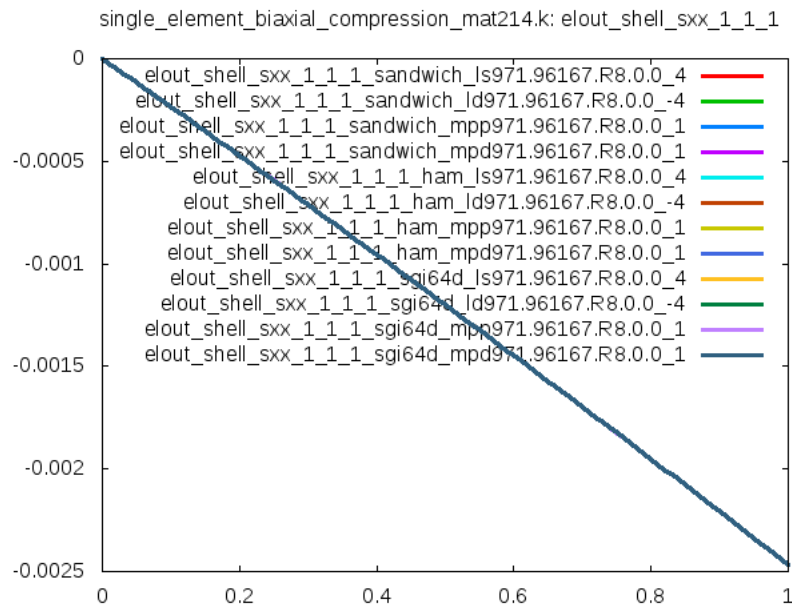


Figure 13: Cross platform results, stress in x-direction, integration point 1, sub test case ID 8

5.3.12 Sub Test Case ID 8 - Test Target 12

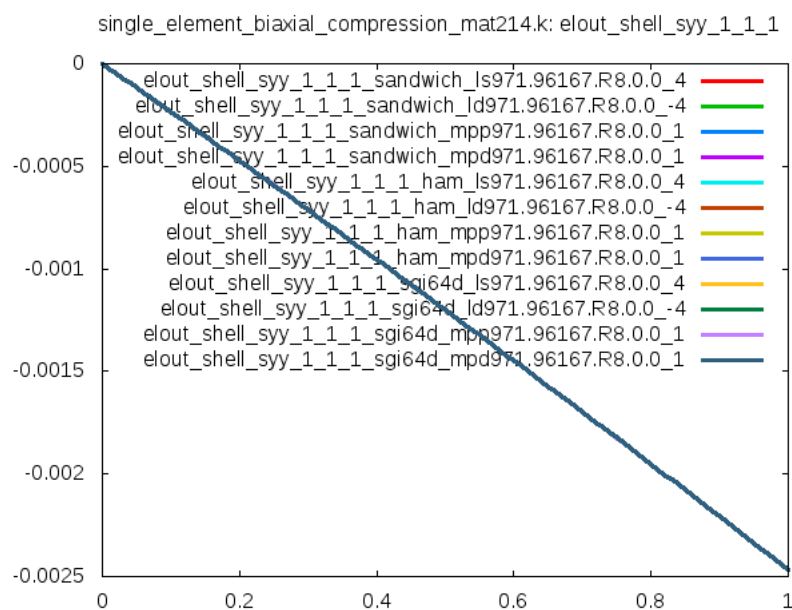


Figure 14: Cross platform results, stress in y-direction, integration point 1, sub test case ID 8

References

- [1] LSTC, *LS-DYNA KEYWORD USER MANUAL*, 7374 Las Positas Road, Livermore, CA, 94551, USA, version 971 ed., May 2007.